




- 1500VDC isolation between Gate and Drive
- Basic insulation (1.4mm creepage/clearance) operation available.
- Operating frequency: 50KHz and up

Electrical Specifications @25°C					
Part Number	Turns Ratio @100KHz/0.1V	OCL @100KHz/0.1V	LK @100KHz/0.1V	DCR	HI-POT (VDC, 1mA, 1S)
		1-3:6-4	1-3	1-3 (short 6-4)	1-3/6-4
ACM0420CE	1:1 2%	785uH Min	0.46 uH Max	0.60Ω Max	1500

All specifications subject to change without notice.

**MECHANICAL**

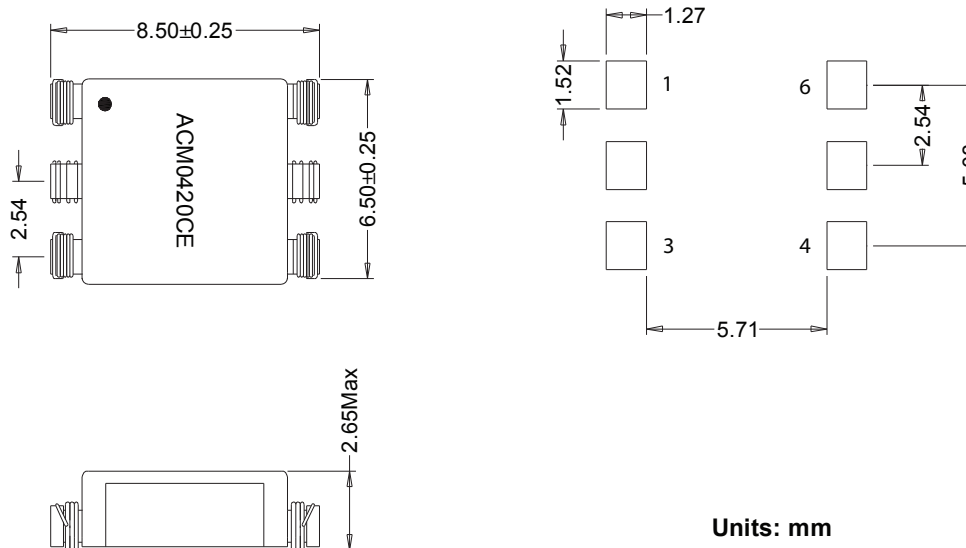

Units: mm

**SCHEMATICS**

