



COMMON MODE CHOKES


- For LAN/Telecom applications
- High Impedance to minimize common mode noise
- Excellent EMI performance
- Surface Mount
- Standard Operating Temp: 0°C to +70°C

| Electrical Specifications @25°C | | | | | | | | | | | | |
|---------------------------------|---------------------------|-------------|-----------------------------|-------|--------|--------|--------|---------|---------|---------|---------------|-------|
| Part Number | OCL @100KHz/0.2V (uH MIN) | DCR (Ω Max) | Common Mode Attenuation(dB) | | | | | | | | HI-POT (Vrms) | |
| | | | 100 KHz | 1 MHz | 10 MHz | 30 MHz | 50 MHz | 100 MHz | 300 MHz | 500 MHz | | 1 GHz |
| ACM0802CS | 100 | 0.60Ω | 14 | 33 | 44 | 48 | 49 | 44 | 34 | 29 | 20 | 500 |

All specifications subject to change without notice.

MECHANICAL

ACM0802CS

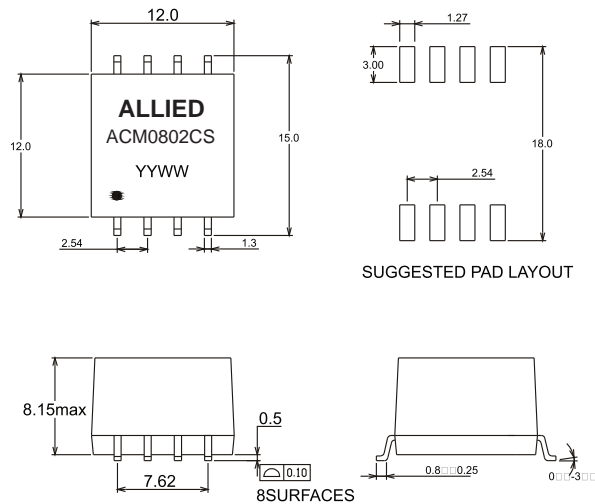

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

ACM0802CS

