



COMMON MODE CHOKES

- For LAN/Telecom applications
- High Impedance to minimize common mode noise
- Excellent EMI performance
- Surface Mount
- Standard Operating Temp: 0°C to +70°C


Electrical Specifications @25°C

Part Number	OCL (uH Min)	DCR(25°C) (Ω Max)	Common Mode Attenuation							HI-POT (vrms)	
	100KHz 0.2V		100KHz	1MHz	10MHz	30MHz	50MHz	100MHz	300MHz		500MHz
ACM4001CS	47	0.4	-13dB TYP	-27dB TY	-40dB TYP	-44dB TYP	-42dB TYP	-36dB TYP	-26dB TYP	-15dB TYP	500

All specifications subject to change without notice.

MECHANICAL

ACM4001CS

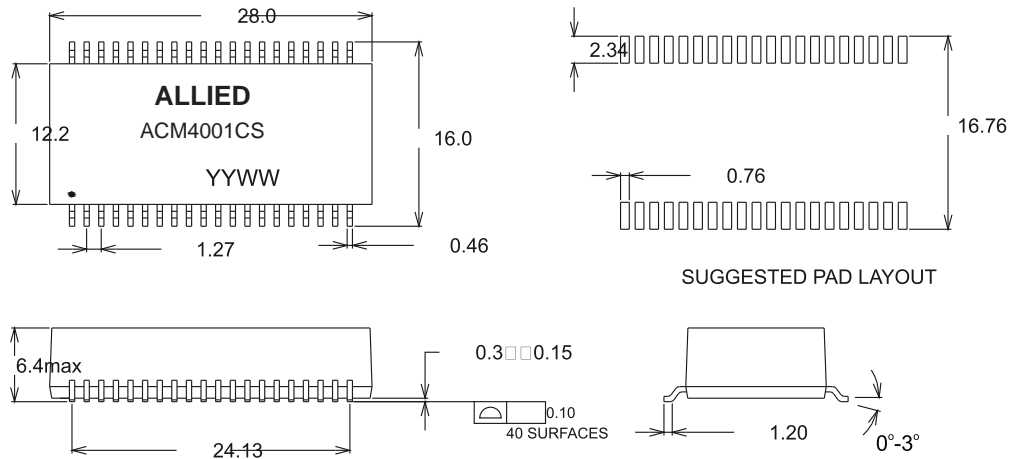

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

ACM4001CS

