



ADSL LINE TRANSFORMER THROUGH HOLE MAGNETICS


- EN60950 Basic Insulation compliant 250Vrms
- Through Hole compact foot print design
- Industrial operating temp: -40°C to +85°C

Electrical Specifications @25°C

Part Number	Turns Ratio (10KHz,0.1V)	OCL (10KHz,0.1V)	LL (100KHz,0.1V)	THD	
AEP026DI	1-5:10-6(short 2-4,9-7)	1-5(short 2-4)	1-5(short 2-4,6-7-9-10)	30KHz,3.16V	
	2:1 ±2%	409.5uH ±5%	12uH max	-80dB max	
	Continue				
	DCR			LB	Hi-Pot VAC
	1-4	2-5	9-6	10-7	30KHz-650KHz
	0.9Ω max	0.9Ω max	0.33Ω max	0.33Ω max	50dB min
				1875	

All specifications subject to change without notice.

MECHANICAL

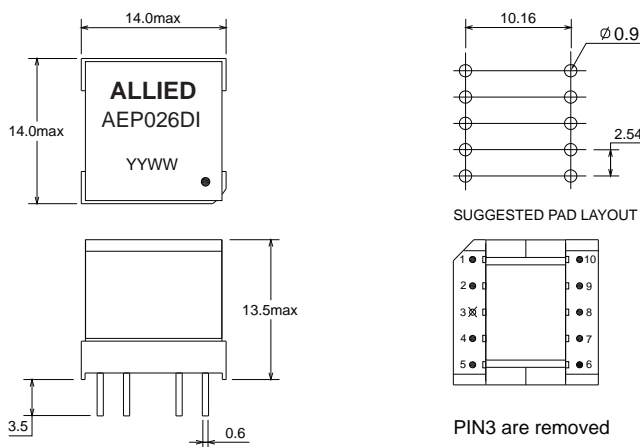

PIN3 are removed

Units:mm

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

