



10 BASE-T SINGLE PORT SURFACE MOUNT MAGNETICS


- Meets IEEE 802.3af & ANSI X 3.263
- Surface mount, open header construction
- Standard operating temp: 0°C to +70°C

Electrical Specifications @25°C

Part Number	Turns Ratio (±5%)	OCL (uH Min)	Lk (uH Max)	CWW (pF Max)	DCR(25°C) (Ω Max)		HI-POT	Primary Pins
	Pri:Sec	100KHz,0.2V	100KHz 0.2V	100KHz 0.2V	Pri	Sec		
AT1623CS	1:1	7.5	0.1	5	0	2	1500	1-3,6-8

All specifications subject to change without notice.

MECHANICAL

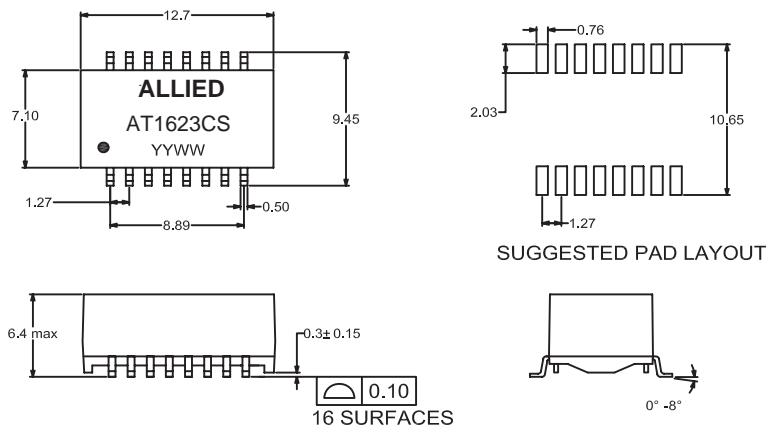

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

