




ISDN S-INTERFACE TRANSFORMER THROUGH HOLE TYPE

- Meets the pulse waveform template of CCITT 1.430 when the recommended transformer and chip set are used.
- Excellent longitudinal balance
- Provides 1500Vrms minimum Isolation
- Standard operating temp: 0°C to +70°C

Electrical Specifications @25°C							
Part Number	Turns Ratio (±5%)	OCL (mH Min)	LL (uH Max)	CWW (pF Max)	DCR(25°C) (Ω Max)	HI-POT	Primary Pins
	Pri:Sec	10KHz,0.1 V	100KHz ,0.1V	1MHz 0.5V	Pri	1500VAC	1-4,5-8
ATE1601DS	1:2	22	5	85	2.5		

All specifications subject to change without notice.

MECHANICAL

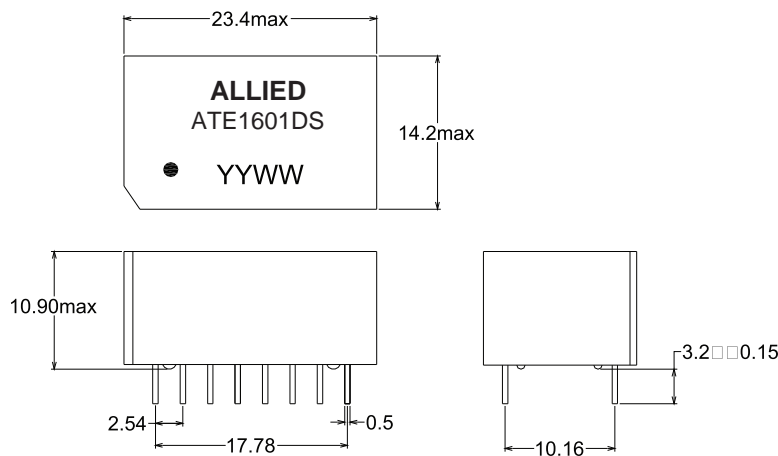

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

