




T1/E1/CEPT/ISDN-PRI TRANSFORMERS DUAL PORT SURFACE MOUNT TYPE

- Quad SMT package contains both transmit & receive transformers
- Models matched to leading Transceiver IC's
- Surface mount open header construction
- UL Recognized
- Standard operating temp: 0°C to +70°C (see footnote)
- Industrial operating temp: -40°C to +85°C (see footnote)

Electrical Specifications @25°C							
Part Number	Turns Ratio (±5%)	OCL PRI (mH Min)	LL (mH Min)	CWW (pF Max)	DCR(25°C) (Ω Max)	HI-POT	Primary Pins
	Pri:Sec	10KHz 0.1V	100KHz 0.1V	1MHz 0.5V	Pri		
ATE2401C_	1CT:1CT & 1CT:2CT	1.2	1.2	35pF	0.8 Ω	1500VAC	24-23,4-6,18-16,10-12

*Complete part number by inserting "S" for Standard Temp or "I" for Industrial Temp. All specifications subject to change without notice.

MECHANICAL

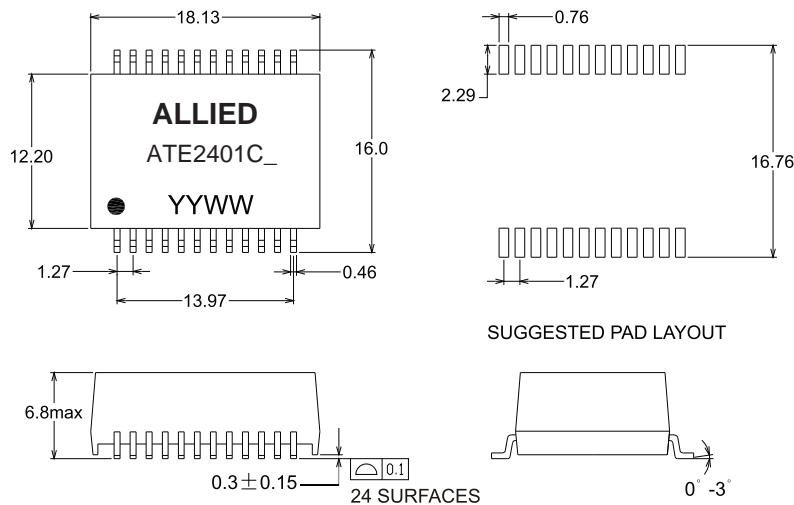

SUGGESTED PAD LAYOUT

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

