



T1/E1/CEPT/ISDN-PRI TRANSFORMERS DUAL PORT SURFACE MOUNT TYPE

- Quad SMT package contains both transmit & receive transformers
- Models matched to leading Transceiver IC's
- Surface mount open header construction
- UL Recognized
- Standard operating temp: 0°C to +70°C (see footnote)
- Industrial operating temp: -40°C to +85°C (see footnote)


Electrical Specifications @25°C						
Part Number	Turns Ratio (±3%)	OCL(25°C) (mH MIN)	LL (uH MAX)	C _{ww} (pF MAX)	DCR (Ω Max)	Primary Pins
	Pri:Sec	10KHz,0.1V	100KHz,0.2V	100KHz,0.2V	Pri	Pri
ATE3201C_	1:1.265CT	1.2	0.8	35	0.6	1-3,5-7,10-12,14-16

*Complete part number by inserting "S" for Standard Temp or "I" for Industrial Temp.

All specifications subject to change without notice.

MECHANICAL

ATE3201C_

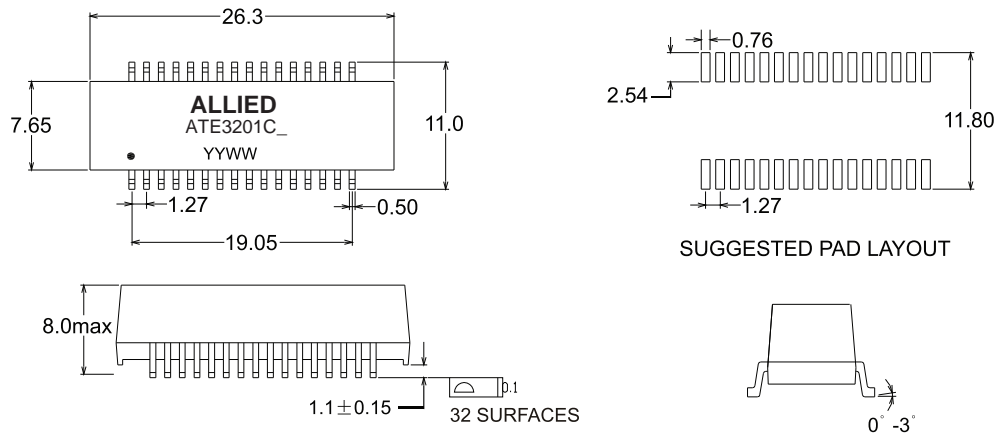

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

ATE3201C_

