




- Common mode chokes for LAN, Telecom and Power applications
- High Impedance to minimize common mode noise
- Excellent EMI performance
- Custom Inductances available to meet your exact requirements
- Operating Temperature Range: -40°C to +130°C

Electrical Specifications @25°C			
Part Number	L(1-3) (pins 2-4 connected)	Rated Current	DCR
	@100KHz 0.1V	A Max	Ω Max
ACM8052-24R7M-RC	24.7 uH±20%	5.0	0.013

All specifications subject to change without notice.

MECHANICAL

ACM8052-24R7M-RC

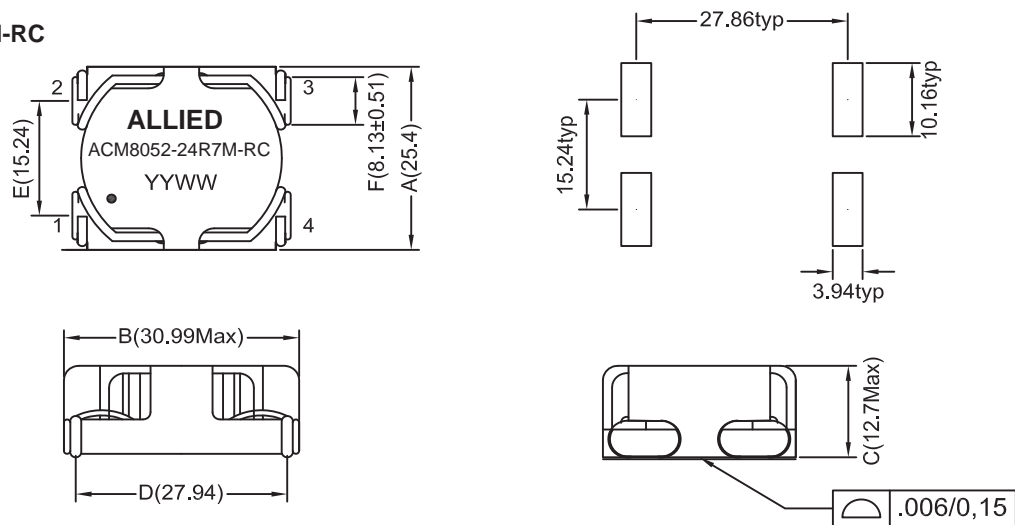

Unless otherwise specified all tolerances are: ±0.25 in mm

SCHEMATICS

ACM8052-24R7M-RC

