



Line Filter/Common Mode Choke

AUT20-4768

- Vertical Mount
- UT20 Through Hole Design
- Operating Temp: -20°C to +105°C including temp rise

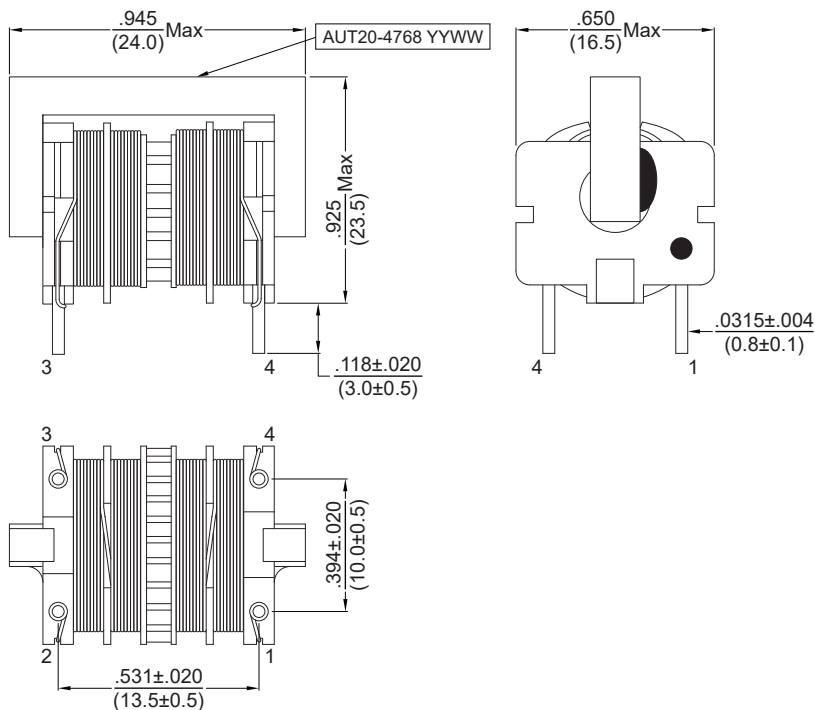


Electrical Specifications @ 25°C

Inductance @10KHz, 0.1V (1-4) = (2-3)	Leakage @10KHz, 0.1V (1-4) Tie (2+3)	DCR (1-2) = (4-3)	Turns Ratio N1 : N2	Rated Current	Hi-Pot 60Hz / 3mA / 3Sec	
					N1 - N2	N1,N2 - Core
6.8mH MIN	55µH MIN	190mΩ Max	1 : 1	0.85A MAX	2500VAC	1000VAC

All specifications subject to change without notice.

MECHANICAL

Dimensions: $\frac{\text{inch}}{(\text{mm})}$ 

SCHEMATIC

