




- Square 24/18 core
- Bobbin made of UL94V-0 material
- Operating Temperature Range: -40°C to +125°C




Electrical Specifications @ 25°C

Inductance +50/-30%		Test Frequency	DC Resistance (Ω) Max		Rated Current (A) Max	Hi-Pot 50Hz/5mA/60Sec N1 - N2 2000VAC
1 - 4	2 - 3		1 - 4	2 - 3		
68mH	68mH	10KHz, 0.1V	1.1	1.1	0.9	

All specifications subject to change without notice.

MECHANICAL

Dimensions: $\frac{\text{inch}}{\text{(mm)}}$

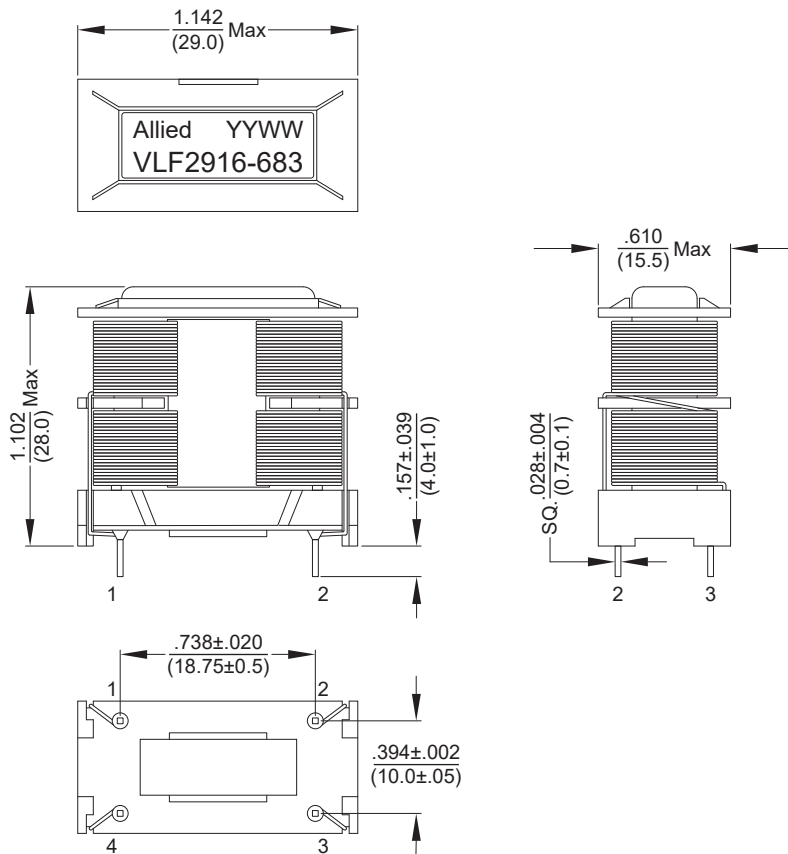

SHEMATIC

