



10/100/1000 Base T Single Port LAN Filter Module

AG2436CI



- Ethernet based LAN, WAN and other networking applications
- LL: 0.5μH Max @ 100KHz, 200mV
- Cw/w: 25PF TYP @ 100KHz, 200mV
- DCR: 0.9Ω Max
- Operating Temp: -40°C to +85°C

Electrical Specifications @ 25°C


| Part Number | OCL(uH Min)<br>@ 100kHz, 200mV | Turns Ratio<br>chip: cable<br>(±5%) | Insertion Loss<br>(dB Max) | Return Loss<br>(dB Min) |       |       |          |
|-------------|--------------------------------|-------------------------------------|----------------------------|-------------------------|-------|-------|----------|
|             | With 8mA DC Bias               |                                     |                            | 0.3-30MHz               | 40MHz | 50MHz | 60-80MHz |
| AG2436CI    | 350                            | 1CT:1CT                             | -1.1                       | -18                     | -14.4 | -13.1 | -12      |

Electrical Specifications @ 25°C

| Part Number | Common Mode Rejection<br>(dB Min) |       |           | Cross Talk<br>(dB Min) |           | Isolation<br>HI-POT<br>(Vrms) |
|-------------|-----------------------------------|-------|-----------|------------------------|-----------|-------------------------------|
|             | 30MHz                             | 60MHz | 80-100MHz | 0.3-60MHz              | 60-100MHz |                               |
| AG2436CI    | -40                               | -35   | -30       | -35                    | -32       | 1500                          |

All specifications subject to change without notice.

MECHANICAL

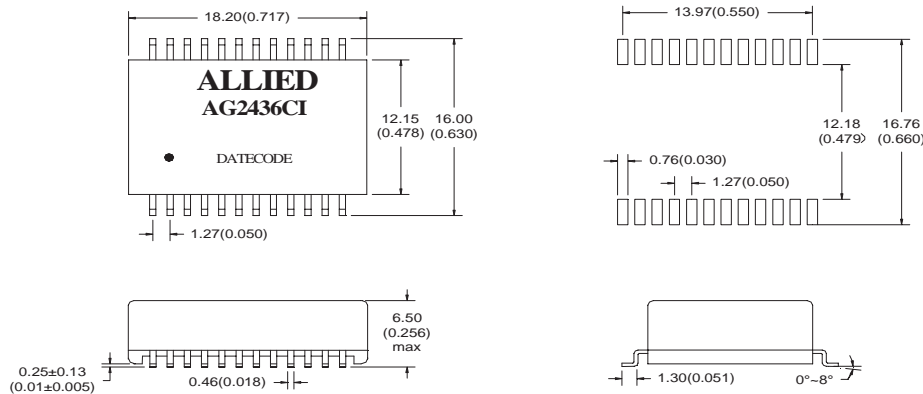

SCHEMATICS

