




- EP13 SMD Package
- Operating Temperature range: -40°C to +130°C
- Maximum reflow temperature: 250°C/-5°C for 20-40 seconds (Refer to IPC/JEDEC J-STD-02C Standard)

Electrical Specifications @25°C		
Inductance Lp @100KHz, 0.1V (3 - 4)	Leakage Inductance Ls @100KHz, 0.1V (3 - 4) (tie 7+8+9+10)	DCR (3 - 4)
77.4 uH (±10%)	0.80 uH Max	220mΩ Max
DCR (8,7 - 10,9)	DCR (2 - 1)	Isolation Voltage @60sec, 0.5mA PRI - SEC
18mΩ Max	250mΩ Max	1500Vac

All specifications subject to change without notice.

MECHANICAL

Dimension
Unit: mm

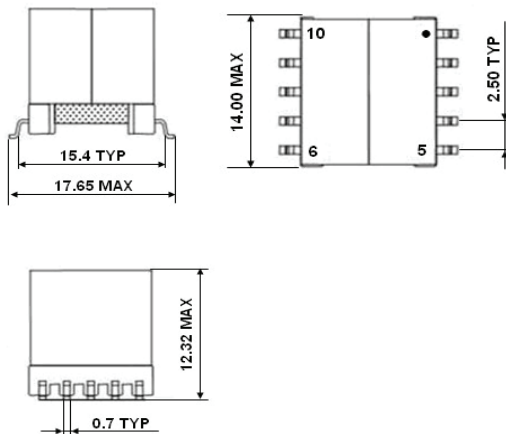

Marking



Remark:
XXXXXXX=PART NUMBER
YYWW=DATE CODE. YY=YEAR; WW=WEEK

SCHEMATICS

