




AUDIO TRANSFORMER

AT4412

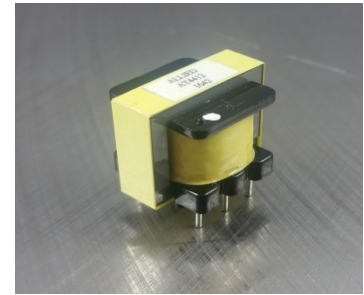


- For Data/Voice Coupling Applications
- Industrial Operating Temp: -40°C to +85°C

Electrical Specifications @25°C

Part Number	Turns Ratio (±2%)	Impedance (Ω ±10%)	Insertion Loss	Freq. Response	DCR (Ω ±20%)		Hi-Pot (60S)		
	(1 - 3) : (4 - 6)	@ 1KHz	@ 1KHz	@300Hz-3KHz	(1 - 3)	(4 - 6)	Pri-Sec	Pri-Core	Sec-Core
AT4412	1 : 1	600	1.4dB Max	±0.5dB	44	56	1500V	1500V	1000V

All specifications subject to change without notice.

MECHANICAL

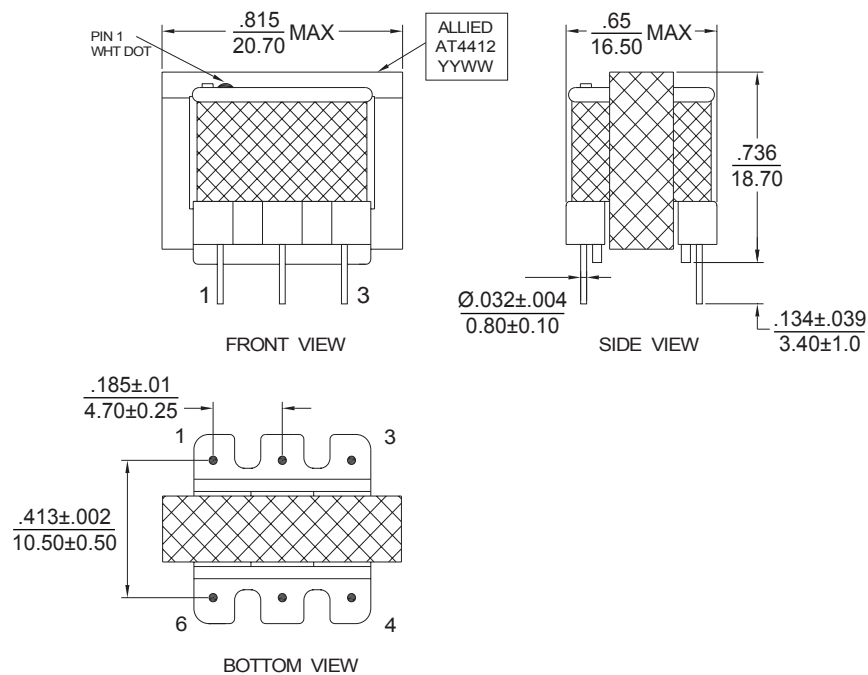

SCHEMATICS

