





# Flat Wire Transformer FWPQ3221-4613-RC

Dimensions:  $\frac{\text{inch}}{\text{mm}}$

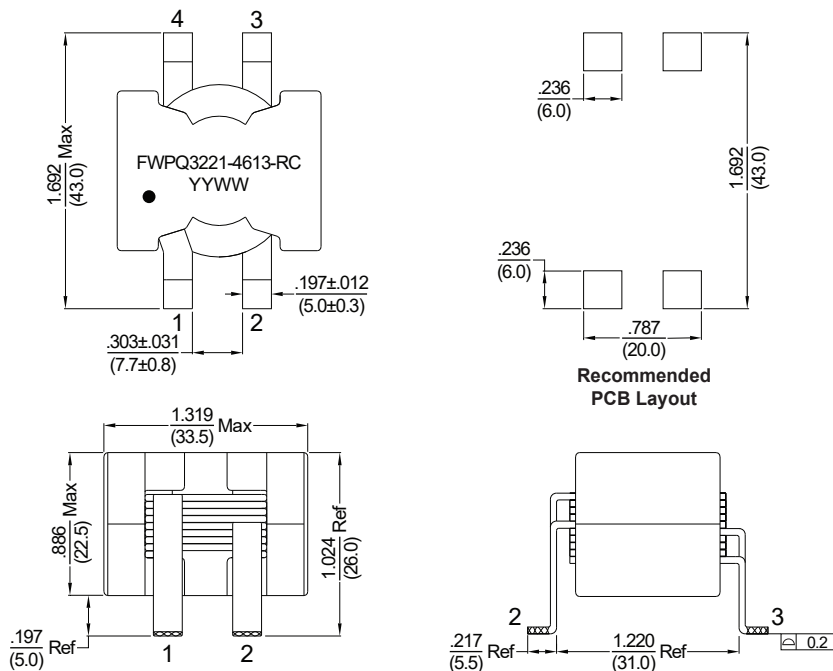


Allied Part Number	Primary Inductance ±20% (µH)	Test Frequency KHz, 0.25V	Turns Ratio @15.75KHz 1.0V ± 5%	DCR (mΩ) Max		HI-POT 2mA / 3Sec
			(1-2) : (3-4)	(1-2)	(3-4)	Wdg-Wdg
FWPQ3221-4613-RC	145	10	4.75 : 4.1	1.3	1.2	1000VDC

All specifications subject to change without notice.

### Features

- Flat Wire SMD Power Transformer
- Low DCR
- High Saturation Current
- Class F Wire

### SCHEMATIC



### Electrical

- Inductance Range:** 145 µH
- Tolerance:** 20%
- Test Frequency:** 10KHz, 0.25V
- Operating Temp:** -40°C to +125 °C

### Physical

- Packaging:** 168 pcs per Carton
- Marking:** Part Number and Date Code