



- EE16 Core Design
- 6 Pin Through Hole


Electrical Specifications @ 25°C

INDUCTANCE @1KHZ/1V (HP-4284A)	LEAKAGE INDUCTANCE @100KHZ/1V (HP-4284A)	DCR CH-502A (MAX)	HI-POT TEST	INSULATION TEST
2 - 1: 0.991mH ±10%	2 - 1: 150uH MAX (SHORT 6-5)	2 - 1: 8.50 OHM	PRI TO SEC: AC 3000V 3mA FOR 1 SEC	PRI TO CORE & COIL:
		6 - 5: 24.9 OHM	CORE TO COIL: AC 1200V 3mA FOR 1 SEC	100 MOHM MIN BY DC 500V


All specifications subject to change without notice.

MECHANICAL

DIMENSION:
UNIT: inch

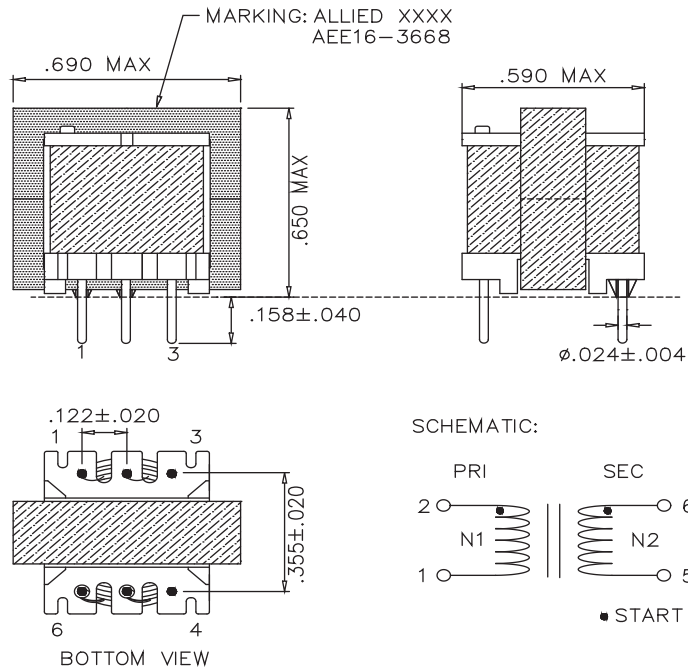

WINDING:

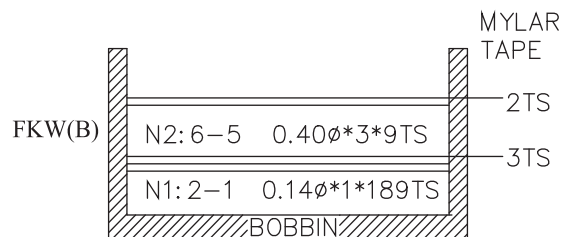

NOTE:
1.CORE FIX TAPE 2TS.