


EFD20 Output Inductor

AEFD20-4513

- EFD20 Through Hole Design
- High Frequency
- Operating Temperature range: -40°C to +130°C




Specifications @25°C

Inductance @10KHz 0.1V (7, 8-5, 6)	Leakage Inductance @100KHz 0.1V (7, 8-5, 6) @PIN 2,3	DCR (7, 8-5, 6)	DCR (2-3)	Turn Ratio @15.75KHz, 1.0V (7, 8-5, 6) : (2-3)	HI-POT PRI TO SEC
10.6µH ±7%	1.5µH Max	13mΩ Max	480mΩ Max	1 : 1 ±3%	1500v/1mA/1Sec

All specifications subject to change without notice.

MECHANICAL

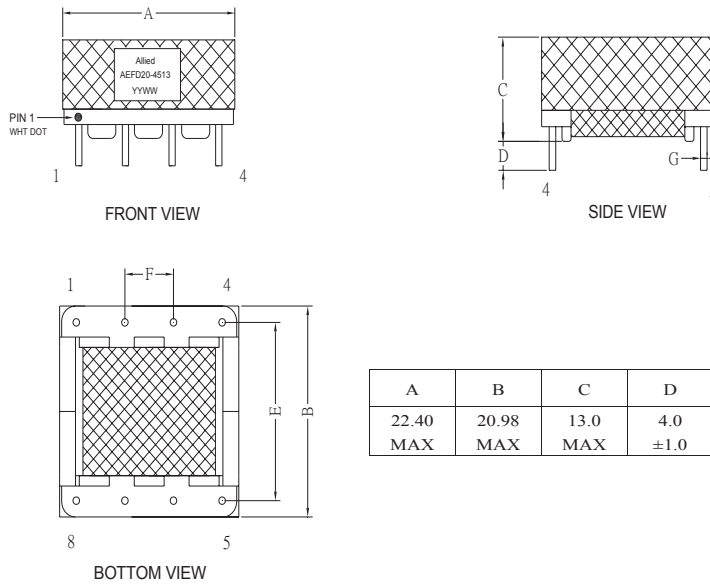

SCHEMATICS

